



55. BELKA DWUNACISKOWA

502, 503, 504, 506

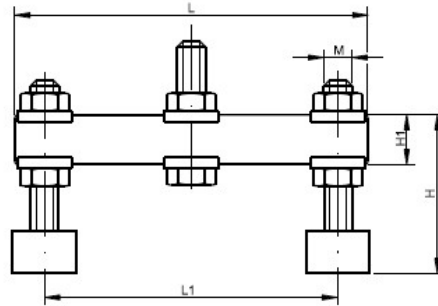

Służy do mocowania przedmiotu obrabianego w dwóch miejscach, lub do mocowania dwóch przedmiotów obrabianych. Obok przedstawiamy przykłady zastosowania belki dwunaciskowej.

Nr	 [kg]	H	H1	L	L1	M	Przeznaczone dla
502	0,14	30÷44	14	96	32÷80	M6x40	8...2.. , 9...2.. , 012, 022, 052, 112, 152
503	0,24	39÷53	17	120	36÷102	M8x50	8...3.. , 9...3..
504	0,35	40÷71	20	150	48÷132	M8x65	8...4.. , 9...4..
506	0,73	51÷81	25	200	50÷160	M10x90	8...4.. , 9...4..